


MSTC, RS, & CMST STRAPS IN FIELD BENT APPLICATIONS


USP recently conducted research to investigate the capacity of a field bent strap creating a bearing area (see drawing below). Published in the table below are capacities for some of our strap and coil strap products using a predefined bearing area and fastening schedule. Using this application will assist the responsible designer in reducing the number of different products used on a project.

Simply bend a section of the strap over a rigid corner such as an edge of concrete. Trim the horizontal leg of the strap as needed for a finished edge. It is permissible to make one complete bend on the strap. The bend shall be a clean, sharp 90 degree bend. **Important:** Additional bending may reduce the capacity of the strap.

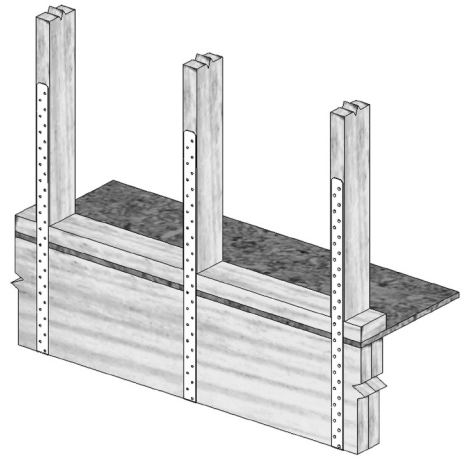

Installation:

- Use all specified fasteners.
- Bend strap only once.

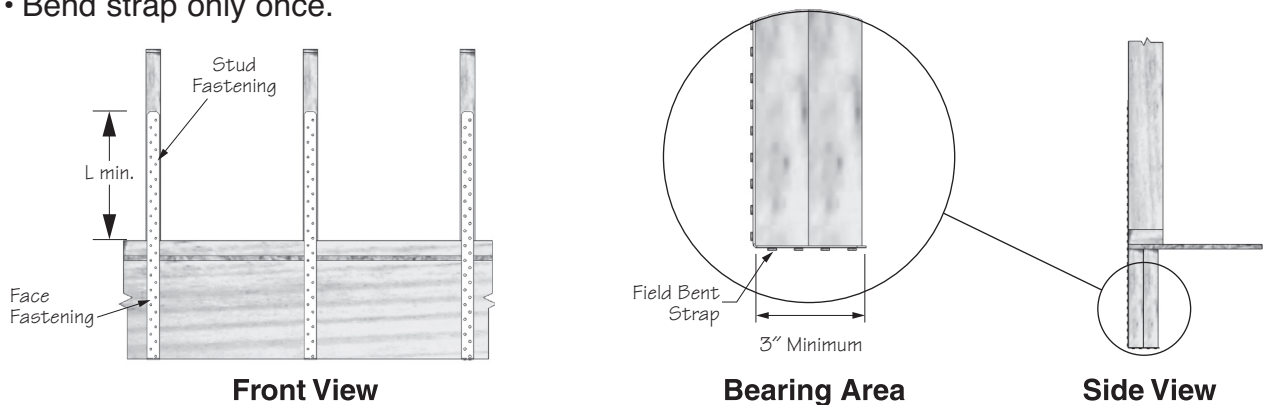

USP Stock No.	Steel Gauge	Dimensions		Fastener Schedule			Allowable Loads (Lbs.) ^{2,3}
		W	L Min. ⁴	Stud	Bottom	Face	DF-L / SP
Flat Strap							
MSTC40	16	3	22	(28) 10d	(4) 10d	(12) 10d	3110
MSTC66	14	3	28	(36) 10d	(4) 10d	(12) 10d	4110
Coil Strap							
RS150	16	1-1/4	10	(12) 10d	(3) 10d	(7) 10d	1300
CMSTC16	16	3	22	(28) 10d	(4) 10d	(12) 10d	3110
CMST14	14	3	32	(36) 10d	(4) 10d	(12) 10d	4110

1) Minimum 3" length for bearing flange.

2) Allowable loads apply to DF-L/SP. For S-P-F multiply allowable loads by 0.861.

3) Allowable loads have been increased 60% for wind and seismic loads; no further increase shall be permitted.

4) L Min. is the minimum strap length required against the wall stud above the sill plate.

USP supplies quality products to build Stronger Safer Structures



A GIBRALTAR INDUSTRIES COMPANY

Customer Service:
Burnsville, MN
Phone: 1-800-328-5934
Fax: 1-507-364-8762

Manufacturing:
Montgomery, MN • Livermore, CA
Largo, FL • Thornhill, Ontario

Warehouses:
Houston, TX
Lumberton, NJ

www.USPconnectors.com

Information valid until December 31, 2010.

A GIBRALTAR INDUSTRIES COMPANY

USP1086-101