



MSTAM36 STRAP TIE

MASONRY APPLICATION

USP's MSTAM36 Strap Tie can be used to connect framing members to wall structures. Allowable loads are based upon the proper use of fasteners installed as per the manufacturer's specifications:

Installation:

- Masonry screw shall be 1/4" diameter.
- Minimum masonry screw embedment shall be 1 1/2".
- Install masonry screws **only** in **shaded fastener holes** as indicated on illustration to achieve listed loads.

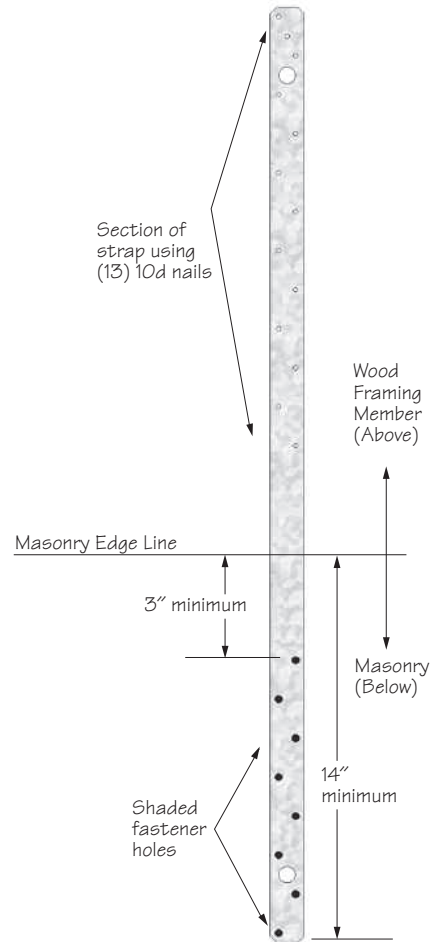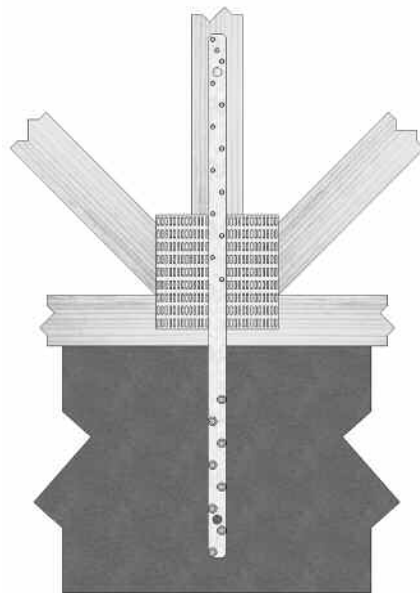

USP Stock No.	Description	Fastener Schedule ²		Allowable Loads (Lbs.) ^{1,3,5}	
		Wood Nails ⁴	Masonry Screw Anchor	Uplift	
				133%	160%
MSTAM36	1-1/4" x 36" Strap Tie	(13) 10d Common	(8) 1/4" Tapcon	1945	1945

- 1) Allowable loads assume use of ITW Buildex 1/4" x 2-1/4" Tapcon fasteners.
- 2) Fasteners to be installed per manufacturer's specifications.
- 3) Allowable loads assume specified holes to be filled.
- 4) A 10d common nail is 3 inches long and 0.148 inches in diameter.
- 5) Allowable loads are derived from tests performed using hollow C90 concrete block.



USP supplies quality products to build Stronger Safer Structures

Customer Service:
Burnsville, MN
Phone: 1-800-328-5934
Fax: 1-507-364-8762

Manufacturing:
Montgomery, MN • Livermore, CA
Largo, FL • Rancho Cucamonga, CA
Thornhill, Ontario

Warehouses:
Houston, TX
Lumberton, NJ

www.USPconnectors.com

A GIBRALTAR INDUSTRIES COMPANY

Information valid until December 31, 2009.

USP2073-071